

Logistec



Logistec JX0 Task Support Vehicle


- Max. Platform height: 2.99m
- Truck size: 1365x1440x750mm, turning radius (1260)
- suitable for narrow spaces
- Light and flexible
- AGM Battery (maintenance free), Li-Ion as option.

Specifications

Max. Platform height: 2.99m;
Truck size: 1365x1440x750mm, turning radius (1260),
suitable for narrow spaces;
Light and flexible;
AGM Battery (maintenance free), Li-Ion as option.

Distinguishing mark	1.1	Manufacturer			Logistec	Logistec
	1.2	Model designation			JX0(Li-ion)	JX0
	1.3	Drive unit			Electric	Electric
	1.4	Operator type			Order-picker	Order-picker
	1.5	Rated capacity	Q	kg	90/110/136	90/110/136
	1.6	Load center distance	C	mm	-	-
Service Weight	1.8	Load distance centre of drive axle to fork	X	mm	-	-
	1.9	Wheelbase	Y	mm	1095	1095
	2.1	Service weight		kg	800	800
Tyres/chassis	2.2	Axle loading, laden front/rear		kg	590/410	590/410
	2.3	Axle loading, unladen front/rear		kg	380/420	380/420
	3.1	Tyre type			Polyurethane/Solid rubber	Polyurethane/Solid rubber
	3.2	Tyre size, front		mm	Ø 210×70	Ø 210×70
	3.3	Tyre size, rear		mm	Ø 250×100	Ø 250×100
	3.4	Additional wheels		mm	Ø 74×48	Ø 74×48
Dimensions	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x 2/2	1x 2/2
	3.6	Tread, front	b10	mm	545	545
	3.7	Tread, rear	b11	mm	640	640
	4.2	Height, mast lowered	h1	mm	1365	1365
	4.3	Free lift	h2	mm	485	485
	4.4	Lift height	h3	mm	3485	3485
	4.5	Height, mast extended	h4	mm	4365	4365
	4.7	Height of overhead/ guard cabin	h6	mm	1410	1410
	4.8	Seat height/standing height	h7	mm	285	285
	4.14	Stand height, elevated	h12	mm	3000	3000
	4.15	Lowered height	h13	mm	-	-
	4.19	Overall length	l1	mm	1440	1440
	4.20	Length to face of forks	l2	mm	-	-
	4.21	Overall width	b1/b2	mm	750	750
	4.22	Fork dimensions	s/e/l	mm	-	-
	4.25	Distance between fork-arms	b5	mm	-	-
	4.32	Ground clearance, center of wheelbase	m2	mm	35	35
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	-	-
Performance data	4.34.2	Aisle width for pallets 800×1200 crossways	Ast	mm	-	-
	4.35	Turning radius	Wa	mm	1260	1260
	5.1	Travel speed, laden/unladen		km/h	6/6.5	6/6.5
	5.2	Lifting speed, laden/unladen		m/s	0.22/0.27	0.22/0.27
	5.3	speed, laden/unladen		m/s	0.31/0.25	0.31/0.25
	5.8	Max. gradeability, laden/unladen		%	5/8	5/8
Electric-engine	5.10	Service brake			Electromagnetic	Electromagnetic
	6.1	Drive motor rating S2 60 min		kw	0.65	0.65
	6.2	Lift motor rating at S3 15%		kw	2.2	2.2
	6.4	Battery voltage/nominal capacity		V/ah	24V/120	24V/120
	6.5	Battery weight		kg	50	71
Addition data	8.1	Type of drive unit			DC	DC
	10.5	Steering design			Electronic	Electronic
	10.7	Sound pressure level at the driver's ear		dB(A)	60	60

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

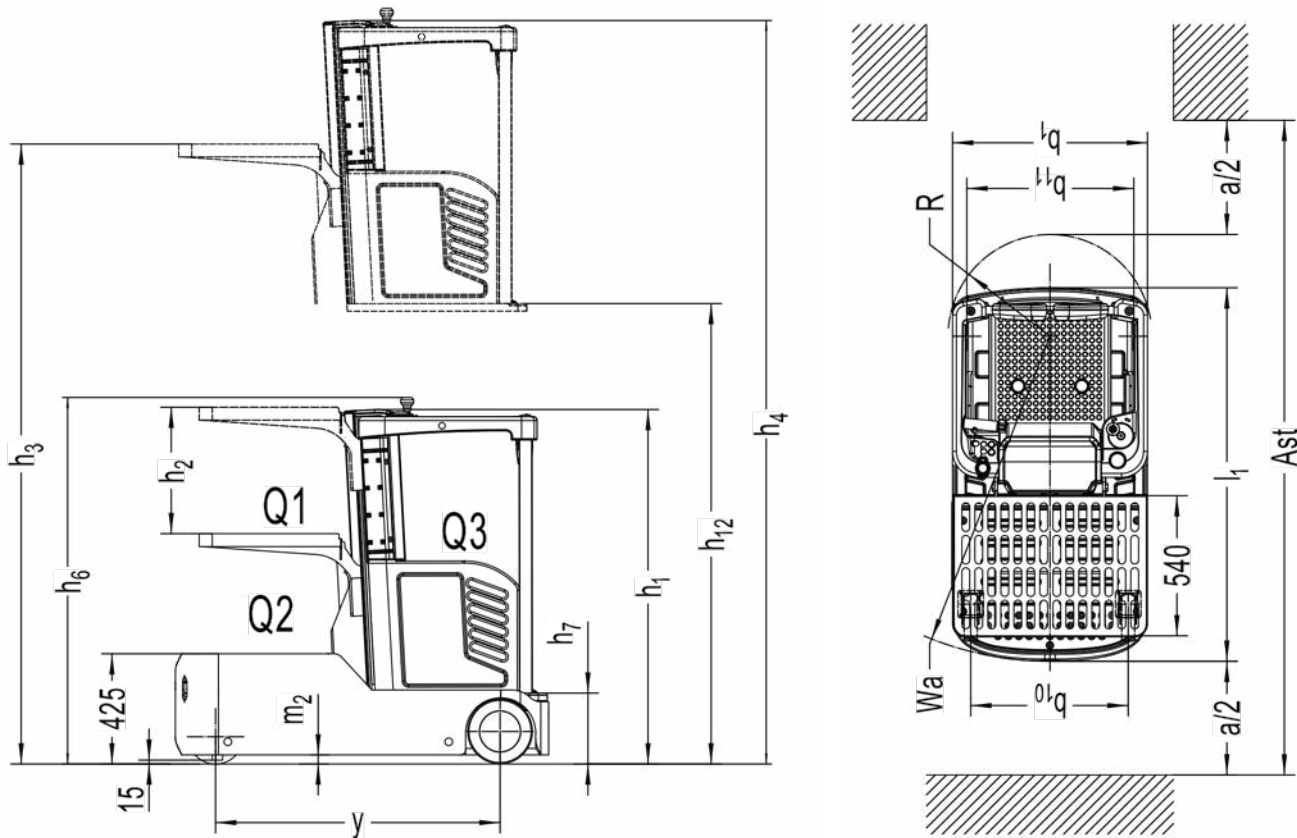

Options

No.	Option items	JX0
2.1	Load wheel type	● Single
2.2	Model designation	● PU
2.3	Load wheel material PU	● PU
2.7	Drive wheel material	● 120 ah
2.8	Battery capacity	● 24V- 15A External
2.9	Charger	● White Time
3.3	Battery indicator	● Yes and not customosed
3.9	Castor wheels	● Front blue lamp
3.12	Blue lamp	● Lowering ○ Driving ○ Reversing
3.18	Hummer	● No ○ Yes and not customised
3.20	Guide wheel	● No ○ Yes and not customised
4.7	Step on the safety switch with both feet	● No

Note ● Standard ○ Optional - Inconformity



www.sitecraft.net.au | 1300 363 152 | sales@sitecraft.com.au