

Logistec



Task Support Vehicle Order Picker

- Meet exactly the same operator's preference as high lifting order picker
- Medium level order picker for various application

Specifications


Distinguishing mark	1.1	Manufacturer			Logistec (3381396)
	1.2	Model designation			Electric Task Support Vehicles / Order Picker
	1.3	Drive			Electric
	1.4	Operator type			Order-picker
	1.5	Load capacity	q	kg	1000 / 136
	1.6	Load center distance	c	mm	600
Service Weight	1.8	Load distance, Centre of drive axel to fork	x	mm	115
	1.9	Wheelbase	y	mm	1365
	2.1	Service weight		kg	1965
Tyres/chassis	2.2	Axle loading, laden front/rear		kg	2205 / 790
	2.3	Axle loading, unladen front/rear		kg	765 / 1200
	3.1	Tyre type			Polyurethane/Solid rubber
	3.2	Tyre size, front		mm	Φ165 x 120
	3.3	Tyre size, rear		mm	Φ260 x 105
	3.4	Additional wheels (castor wheels)		mm	Φ74 x48
Dimensions	3.5	Wheels, number front/rear (x=drive wheels)		mm	1x, 2/2
	3.6	Tread width, front		mm	770
	3.7	Tread width, rear	b11	mm	570
	4.2	Retracted mast height Retracted mast height	h1	mm	2360
	4.3	Free Lift	h2	mm	-
	4.4	Lift height	h3	mm	3600
	4.5	Height, mast extended	h4	mm	5975
	4.7	Height of overhead guard (cabin)	h6	mm	2270
	4.8	Seat height/standing height	h7	mm	220
	4.14	Stand height, elevated	h12	mm	3815
	4.15	Lowered height	h13	mm	63
	4.19	Overall length	l1	mm	2750
	4.20	Length to face of forks	l2	mm	1680
	4.21	Overall width	b1/b2	mm	860
	4.22	Fork dimensions	s/e/l	mm	40 / 100 / 1070
	4.25	Distance between fork-arms	b5	mm	540
	4.32	Ground clearance, center of wheelbase	m2	mm	50
Perfor- mance data	4.34.1	Aisle width for pallets 1000x1200 crossways	Ast	mm	3100
	4.34.2	Aisle width for pallets 800x1200 crossways	Ast	mm	3150
	4.35	Turning radius	Wa	mm	1600
	5.1	Travel speed, laden/unladen		km/h	8 /
	5.2	Lifting speed, laden/unladen		m/s	0.13 / 0.16
	5.3	Lowering speed, laden/unladen		m/s	0.16 / 0.18
Electric- engine	5.8	Max. gradeability, laden/unladen		%	0
	5.10	Service brake			Electromagnetic
	6.1	Drive motor rating S2 60 min		kw	4
	6.2	Lift motor rating at S3 15%		kw	3
	6.4	Battery voltage/nominal capacity		V/ah	24 / 36
Addt. data	6.5	Battery weight		kg	330
	8.1	Type of drive unit			AC
	10.5	Steering design			Electronic
	10.7	Sound pressure level at the driver's ear		dB(A)	70

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.



Options

No.	Option items	Low Profile Task Support Vehicles/Order Picker
1.1	Fork dimension	● 1000*600,2A, 100*40*4070 ○ 1000*600, 2A, 100*40*1200
2.1	Load wheel type	● Single
2.2	Load wheel material	● Rubber
2.3	Drive wheel material	● PU
2.7	Battery capacity	● No ○ 360Ah
2.8	Charger	● No ○ 24V-30A External
2.12	Safehook	● Yes and not customised
2.13	Traction Pin	● No
2.14	Electrostatic chain	● No
2.15	Entry roller	● No
2.9	Battery indicator	● With time
3.3	Castor wheels	● Yes and not customized
3.4	Water auto-filling system	● No
3.7	Warming lamp	● Rear warning light
3.9	Blue lamp	● No
3.12	Hummer	● Drop Buzzer
3.18	Guide wheel	● No
3.19	USB interface	● No
4.1	Battery side pull function	● Yes and not customized
4.7	Overhead guard	● Yes and not customized
5.1	Battery side pull attachment	● No
Note ● Standard ○ Optional - n/a		

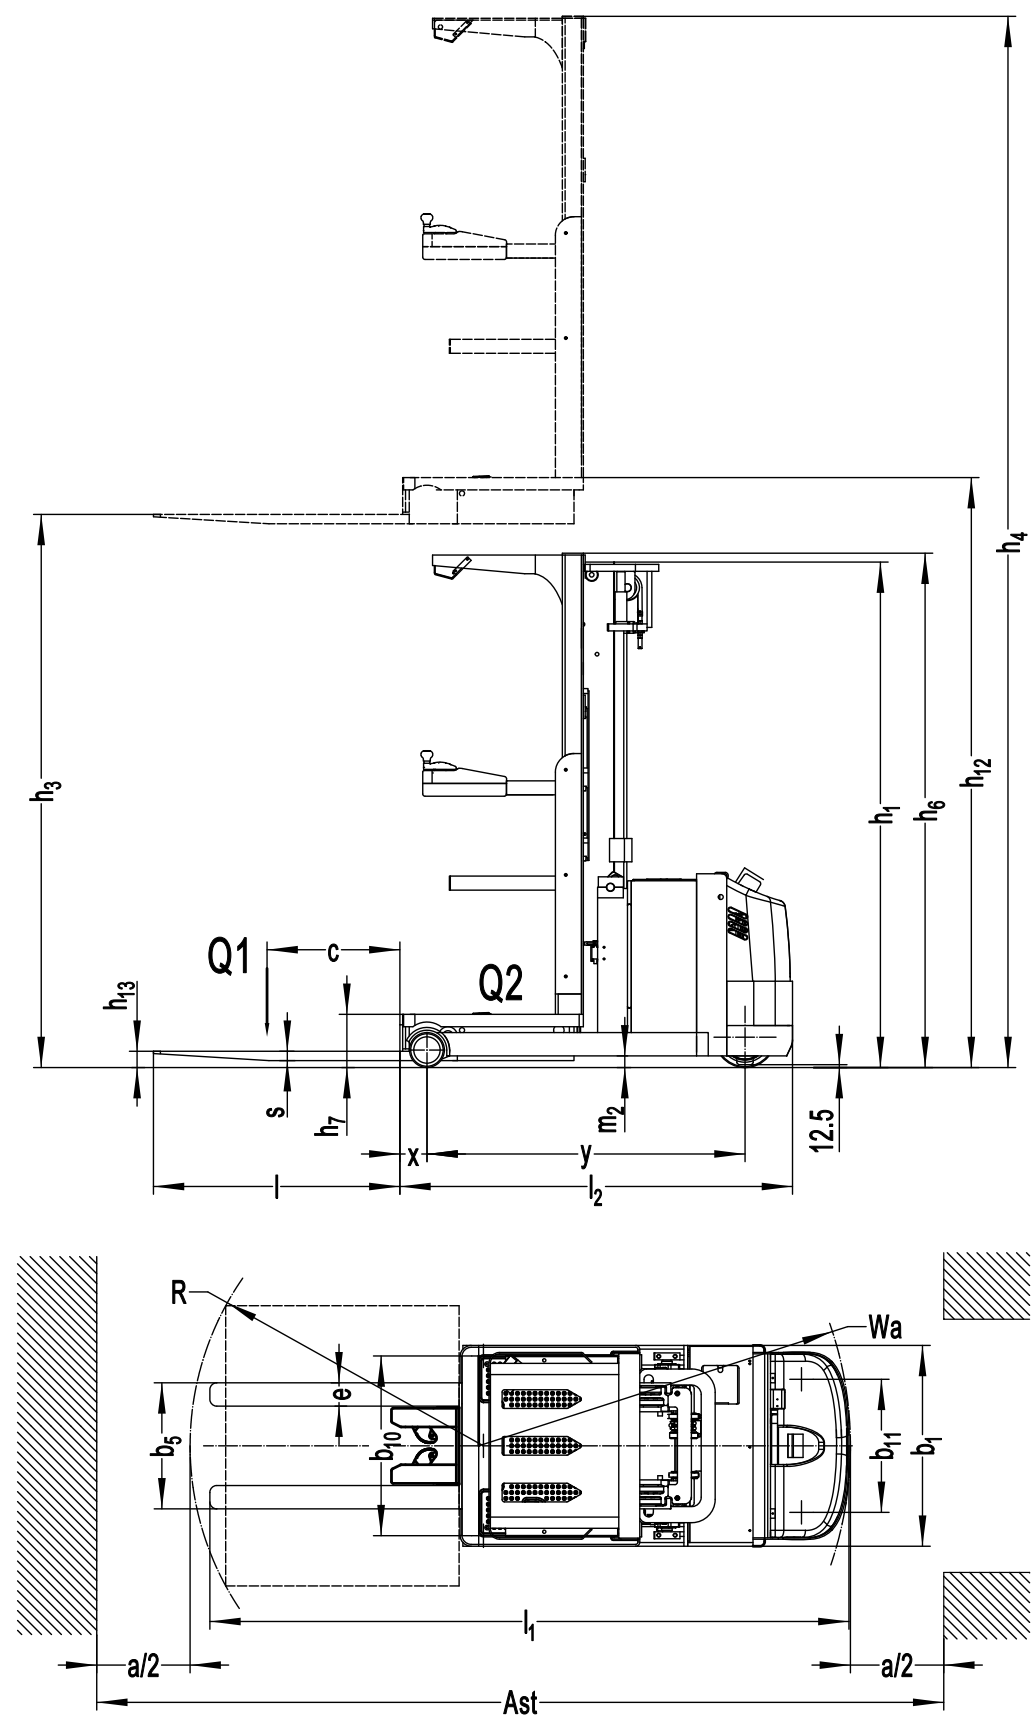



www.sitecraft.net.au | 1300 363 152 | sales@sitecraft.com.au