

Logistec



FULLY ELECTRIC STAND-UP REACH TRUCK

1500kg | 5500mm Lift Height

Product code: 3381392



SPECIFICATIONS

DISTINGUISHING MARK	1.1	Manufacturer			Logistec
	1.2	Model designation			Stand-up reach truck (3381392)
	1.3	Drive			Electric
	1.4	Operator type			Standing
	1.5	Rated capacity	q	kg	1500
	1.6	Load center distance	c	mm	600
	1.8	Load distance, Centre of drive axel to fork	x	mm	500
	1.9	Wheelbase	y	mm	1054
SERVICE WEIGHT	2.1	Service weight		kg	2370
	2.3.1	Axle loading, unladen front/rear		kg	1621/846
	2.4.1	Axle loading, fork advanced, laden front/rear			490/3445
	2.5.1	Axle loading, fork retracted, laden front/rear		kg	1510/2416
TYRES/CHASSIS	3.1	Tyre type			Polyurethane
	3.2.1	Tyre size, front		mm	Φ 260x105
	3.3.1	Tyre size, rear		mm	Φ254x114
	3.4	Additional wheels		mm	Φ178x73
	3.5.1	Wheels, number front/rear (x=drive wheels)		mm	1x/2
	3.6	Tread width, front	b10	mm	700
	3.7	Tread width, rear	b11	mm	974
DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	2/4
	4.2	Height, mast lowered	h1	mm	2050
	4.3	Free lift	h2	mm	0
	4.4	Lift height	h3	mm	5500
	4.5	Height, mast extended	h4	mm	3860
	4.7	Height of overhead/ guard cabin	h6	mm	2255
	4.8	Seat height/standing height	h7	mm	335
	4.10	Height of wheel arms	h8	mm	280
	4.19	Overall length	l1	mm	2335
	4.20	Length to face of forks	l2	mm	1265
	4.21	Overall width	b1/b2	mm	1078/1090
	4.22	Fork dimensions	s/e/l	mm	40/100/1070
	4.23	A,B Fork carriage class/type A, B			2A
	4.24	Fork carriage width	b3	mm	830
	4.25	Distance between fork-arms	b5	mm	200-620
	4.26	Distance between wheel arms/loading surfaces	b4	mm	750
	4.28	Reach distance	l4	mm	665
	4.31	Ground clearance, laden, below mast	m1	mm	70
	4.32	Ground clearance, center of wheelbase	m2	mm	70
	4.34.1	Aisle width for pallets 1000x1200 crossways	Ast	mm	2745
	4.3.2	Aisle width for pallets 800x1200 crossways	Ast	mm	2770
	4.35	Turning radius	Wa	mm	1765
	4.37	Length across wheel arms	l7	mm	1912
PERFORMANCE DATA	5.1	Travel speed, laden/unladen		km/h	8.5/9
	5.2	Lifting speed, laden/unladen		m/s	0.28/0.44
	5.3	Lowering speed, laden/unladen		m/s	0.52/0.48
	5.4	Reaching speed, laden /unladen			0.1/0.1
	5.8	Max. grade-ability, laden/unladen		%	8/10
	5.10	Service brake			Electromagnetic
ELECTRIC-ENGINE	5.11	Parking brake			Electromagnetic
	6.1	Drive motor rating S2 60 min		kw	4
	6.2	Lift motor rating at S3 15%		kw	8.2
	6.4	Battery voltage/nominal capacity		V/ah	48/420
	6.5	Battery weight		kg	739
ADDT. DATA	8.1	Type of drive unit			AC
	10.5	Steering design			Mechanical
	10.7	Sound pressure level at the driver's ear		dB(A)	75

MAST OPTIONS

SERVICE WEIGHT (INCLUDE BATTERY)

LIFT HEIGHT H3 (MM)	HEIGHT, MAST LOWERED H1 (MM)
2 STAGE MAST	
2700	2345
3000	2370
3300	2395
3640	2420
4000	2445
4300	2470
3 STAGE MAST	
4000	2510
4500	2540
5000	2570
5500	2600
6000	2630
6500	2660
7000	2650
7500	2680

MAST

MAST TYPE	LIFT HEIGHT H3 (MM)	HEIGHT, MAST LOWERED H1 (MM)	HEIGHT, MAST EX- TENDED H4 (MM) NO BACKREST	HEIGHT, MAST EX- TENDED H4 (MM) 'W' BACKREST	HEIGHT, FREE LIFT H2 (MM) NO BACKREST	HEIGHT, FREE LIFT H2 (MM) 'W' BACKREST
2 Stage Mast	2700	1900	3266	3560	0	0
	3000	2050	3566	3860	0	0
	3300	2200	3866	4160	0	0
	3640	2370	4206	4500	0	0
	4000	2550	4566	4860	0	0
	4300	2700	4866	5160	0	0
MAST TYPE	LIFT HEIGHT H3+H13 (MM)	HEIGHT, MAST LOWERED H1 (MM)	HEIGHT, MAST EX- TENDED H4 (MM) NO BACKREST	HEIGHT, MAST EX- TENDED H4 (MM) 'W' BACKREST	HEIGHT, FREE LIFT H2 (MM) NO BACKREST	HEIGHT, FREE LIFT H2 (MM) 'W' BACKREST
3 Stan- dard Mast	4000	1930	4700	4860	1060	1060
	4500	2100	5200	5360	1240	1240
	5000	2270	5700	5860	1400	1400
	5500	2440	6200	6360	1580	1580
	6000	2610	6700	6860	1740	1740
	6500	2780	7200	7360	1920	1920
	7000	2950	7700	7860	2080	2080
	7500	3120	8200	8360	2260	2260

DIMENSIONS (MM)

		WITHOUT SIDE SHIFT		WITH SIDE SHIFT	
		2-STAGE MAST	3-STAGE MAST	2-STAGE MAST	3-STAGE MAST
Overall length (minimum)	I1	2335	2357	2370	2392
Length to face of forks	I2	1265	1287	1300	1322
Reach distance	I4	665		630	
Aisle width for pallets 1000×1200 crossways	Ast	2745	2760	2763	2783
Aisle width for pallets 800×1200 lenthways	Ast	2770	2790	2801	2820
Aisle width for pallets 1000×1200 lenthways	Ast	2825	2843	2853	2872
Aisle width for pallets 800×1200 crossways	Ast	2635	2645	2651	2662

BATTERY


LIFT HEIGHT H3 (MM)	HEIGHT, MAST LOWERED H1 (MM)
2 STAGE MAST	
300	600
345	560
360	620
420	739
450	739
465	739



OPTIONS

NO.	OPTION ITEMS	
1.1	Fork dimension	O900*600 2A 100*40*920 ●900*600 2A 100*40*1070 O900*600 2A 100*40*1150 O900*600 2A 100*40*1220 O900*600 2A 100*40*1370
1.2	Leg width	●751
1.4	Fork carriage width	●620mm(Without side shifter) O655mm(With side shifter)
1.5	Backrest Height	●820mm(Without side shifter) O995mm(With side shifter)
2.1	Load wheel type	●Single
2.2	Load wheel material	●Polyurethane
2.3	Drive wheel material	●Polyurethane
2.7	Battery capacity	O300Ah ●420Ah O450Ah O465Ah O260Ah-Li O360Ah-Li ●48V-60A External O48V-50A External O48V-45A External
2.8	Charger	
2.11	Attachments	●No O Built in side shifter
3.4	Water auto-filling system	●No O Yes and not customised
3.5	Front lamp	●LED
3.6	Rear lamp	●No OLED
3.7	Warning lamp	●No O Yes and not customised
3.9	Blue lamp	●No O Yes and not customised
3.10	Area warning lamp	●No O Yes and not customised
3.11	Rear view mirror	●No O Yes and not customised
3.12	Buzzer	●No O Yes and not customised
3.14	Camera	●No O Yes and not customised
3.15	Fire extinguisher	●No O Yes and not customised
3.23	Telematics	●No O Yes and not customised
4.1	Battery side pull function	●No O Yes and not customised
4.2	Cold storage	●No O Yes and not customised
4.6	Forks tilt forward and backward	●No O Yes and not customised
4.7	Overhead guard	●Yes O Yes and can be customised (Drive-In)
5.1	Battery side pull attachment	●No O Side pull bracket

Note ● Standard O Optional - n/a

RATED CAPACITIES GRAPH

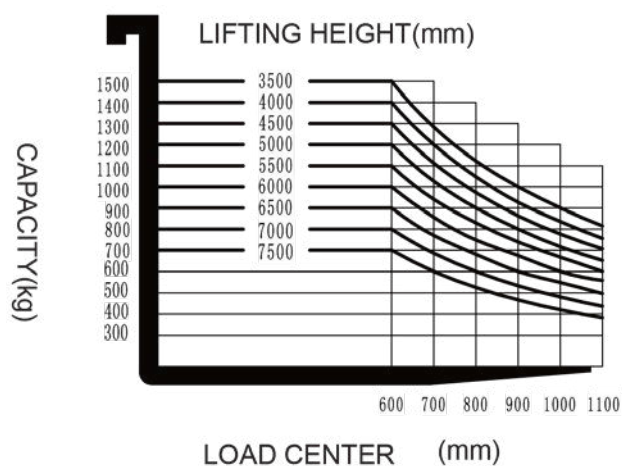

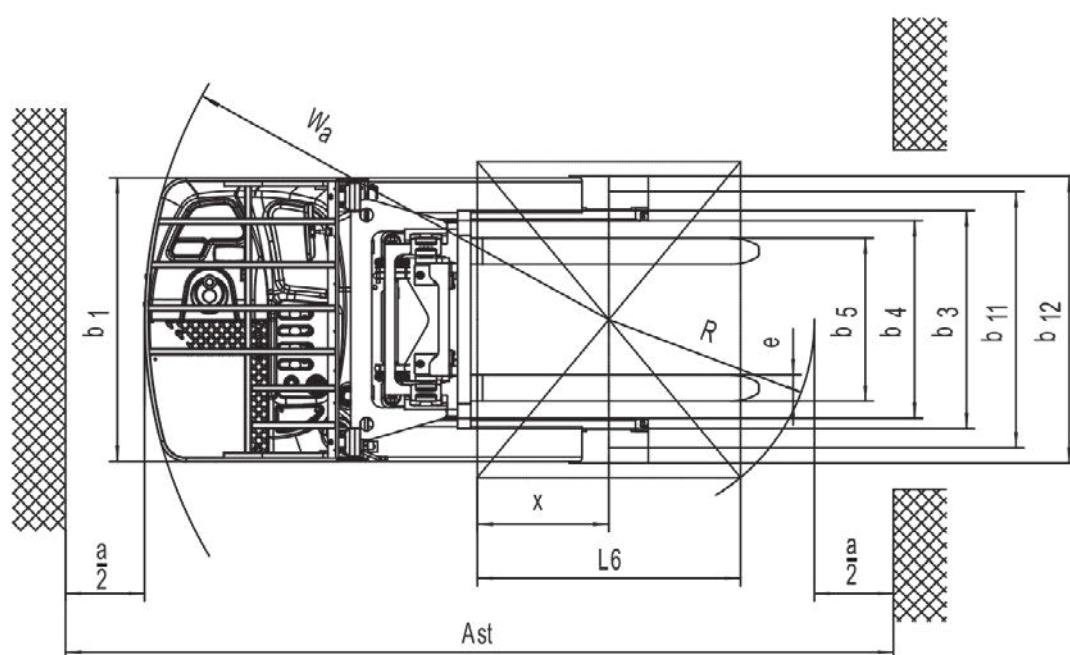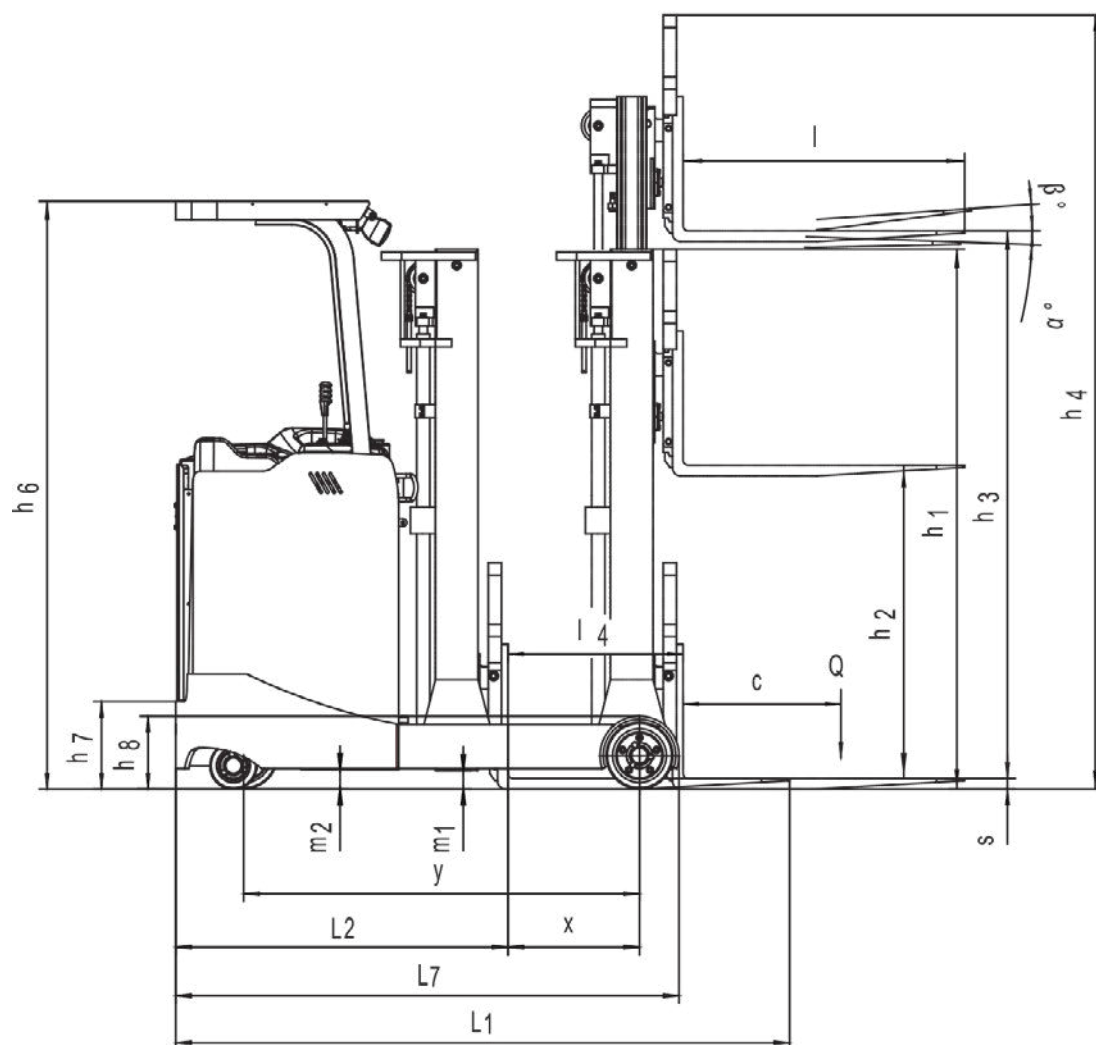



SITECRAFT

MATERIALS HANDLING EQUIPMENT



1300 363 152
sales@sitecraft.com.au
www.sitecraft.com.au

Melbourne

17 Macquarie Drive
Thomastown, VIC, 3074

Sydney

2/15 Bonz Place,
Seven Hills, NSW 2147

Canberra

Brisbane

Adelaide



Sitecraft has achieved certification from SAI Global for Quality Management System (ISO 9001), Occupational Health and Safety (ISO 45001) and Environmental Management System certification (ISO 14001). These three standards provide Sitecraft with a structured management system that supports the organizations commitment to adopt best practices in every area of its operations.

Fully Electric Stand-up Reach Truck | 1500kg | 3000mm Lift Height

Product Guide - Edition 2023 - REV00