



SITECRAFT

MATERIALS HANDLING EQUIPMENT

Logimove 1500

SUITED FOR
ALL
ENVIRONMENTS

1500 KG
CAPACITY



COMPACT, ANTI-VIBRATION, ENERGY SAVING ELECTRIC PALLET TRUCK

- ✓ EMERGENCY DISCONNECT BUTTON GUARANTEES SAFETY
- ✓ ERGONOMICALLY DESIGNED TILLER HEAD INCREASES EFFICIENCY
- ✓ TWIST-RESISTANT ROBOT CABLES EXTEND OVERALL LIFE SPAN
- ✓ ENVIRONMENTALLY FRIENDLY DESIGN TO MAXIMISE RUNNING TIME
- ✓ TEMPERATURE INDICATOR FOR BATTERY PROTECTION
- ✓ ANTI-VIBRATION TECHNOLOGY EXTENDS MAINTENANCE-FREE BATTERY LIFE
- ✓ FULLY INTEGRATED CHARGING UNIT FOR EASY CHARGING
- ✓ COMPONENTS EASILY DIAGNOSABLE AND REPLACEABLE
- ✓ HEAVY-DUTY DRIVE UNIT & STABILISERS ENSURE STABILITY & MANOEUVRABILITY

PREMIUM FEATURES



ENVIRONMENTALLY
FRIENDLY DESIGN



MULTI-SURFACE
STABILISERS



ANTI-VIBRATION
TECHNOLOGY



INTERNAL CHARGING
UNIT

> [sitecraft.com.au](https://www.sitecraft.com.au)

1300 363 152

PRODUCT SPECIFICATION

The parameters in this table are of the standard model. These are subject to change without notice.

DISTINGUISHING MARK

1.1	Manufacturer	-	-	Logistec
1.2	Model designation	-	-	Logimove 1500
1.3	Drive unit	-	-	Electric
1.4	Operator type	-	-	Walking Type
1.5	rated capacity	Q	kg	1500
1.6	Load centre distance	c	mm	600
1.8	Load distance	x	mm	889 / 946
1.9	Wheelbase	y	mm	1268 / 1231

WEIGHT

2.1	Service weight (inc. battery)	-	kg	205
2.2	Axle loading, laden driving side / loading side	-	kg	550 / 1155
2.3	Axle loading, unladen driving side/loading side	-	kg	180 / 25

TYPES / CHASSIS

3.1	Tyre type driving wheels / loading wheels	-	-	Polyurethane
3.2	Tyre size, driving wheels (diameter x width)	-	mm	Φ210x70
3.3	Tyre size, loading wheels (diameter x width)	-	mm	/
3.4	Tyre size, caster wheels (diameter x width)	-	mm	-
3.5	Wheels, number driving caster / loading (x=drive wheels)	-	mm	1x /4 (1x /2)
3.6	Track width, front,driving side	b ₁₀	mm	-
3.7	Track width,rear,loading side	b ₁₁	mm	410 (535)

DIMENSIONS

4.4	Lift height	h ₃	mm	115
4.9	Height drawbar in driving position min./max.	h ₄	mm	750 / 1170
4.15	Lowered height	h ₁₀	mm	85 (75)
4.19	Overall length	l ₁	mm	1632
4.20	Length to face of forks	l ₂	mm	482
4.21	Overall width	b ₁ / b ₂	mm	685
4.22	Fork dimensions	s/ e/ l	mm	50 / 150 / 1150
4.25	Distance between fork-arms	b ₂	mm	385
4.32	Ground clearance, centre of wheelbase	m ₂	mm	35
4.35	Turning radius	Wa	mm	1485

PERFORMANCE DATA

5.1	Travel speed, laden / unladen	-	km/ h	km/ h	4.5 / 5
5.2	Lifting speed, laden / unladen	-	m/ s	m/ s	0.026/0.031
5.3	Lowering speed, laden / unladen	-	m/ s	m/ s	0.029/0.021
5.8	Maximum gradeability, laden / unladen	-	%	%	5% / 16%
5.10	Service brake type	-	-	-	Electromagnetic


ELECTRIC ENGINE

6.1	Drive motor rating S2 60min	-	kW	0.65
6.2	Lift motor rating at S3 15%	-	kW	0.84
6.3	The maximum allowed size battery	-	mm	265x185x215
6.4	Battery voltage / nominal capacity K20	-	V / Ah	24 / 85
6.5	Battery weight	-	kg	25x5.2

ADDITIONAL DATA

8.1	Type of drive control	-	-	DC
10.5	Steering type	-	-	Mechanical
10.7	Sound pressure level at the driver's ear	-	dB (A)	74

QUICK SPEC

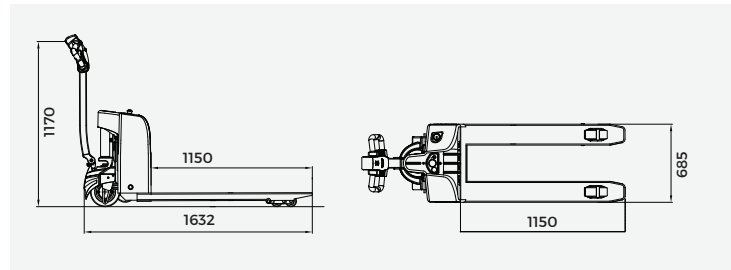

CONTACT US

17 Macquarie Drive
 PO Box 143
 Thomastown VIC 3074
 Australia

CUSTOMER SERVICE

Phone 1300 363 152
 Fax 1300 722 383
sales@sitecraft.com.au
sitecraft.com.au