

T0450 **ELECTRIC BEDMOVER**







Empowering Caregivers,

Improving Patient Care.

Designed to meet the rigorous demands of Australian Healthcare, the T0450 Electric Bed Mover reduces repetitive strain injuries, boosts efficiency, and minimises operational interruptions.





Zero Down time

With a quick-swap, rechargeable battery, the bed mover is ready for 24/7 use, even in high-demand settings



Ergonomically Engineered

Created with healthcare workers in mind, it supports safe, efficient bed movement while promoting sustainability goals.



Compact Charging Solution

The minimal space required for this charging station make this an efficient choice for space-conscious facilities.



Injury Prevention


A single operator can safely move beds, significantly reducing physical strain on hospital staff.



Nationwide Support and Servicing


Through our Product Care Program we offer a highly responsive service network throughout Australia and reliable support.



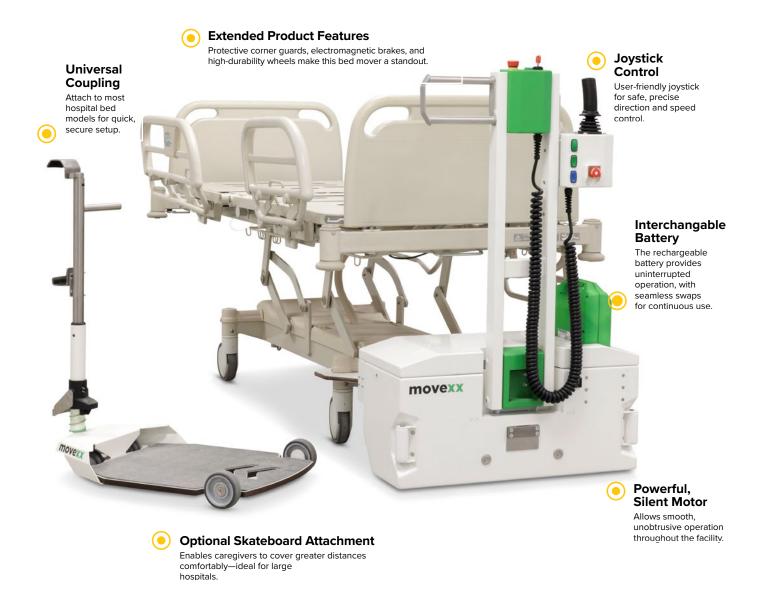

The Solution For Modern Healthcare Needs

The new Sitecraft Electric Bed Mover T0450-M-BM revolutionises hospital bed transport. Crafted to streamline the challenging task of moving beds, it reduces physical strain on caregivers and enhances operational efficiency across healthcare facilities. This ergonomic, all-electric solution is made with precision in the Netherlands, ensuring high standards of quality and durability.

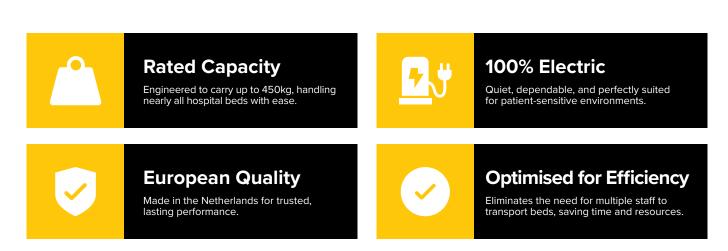

How It Works – Efficiency and Ease in Every Move.

Moving beds with Sitecraft's Electric Bed Mover is as simple as three steps:



Attach

Secure the bed mover to any hospital bed with it's universal coupling



Control

Navigate with the joystick, which manages both speed and direction for safe, smooth transportation.



Swap Battery as Needed

The interchangeable battery allows nonstop operation without wait times.universal coupling

SPECIFICATION	
CHARACTERISTICS	
ТҮРЕ	DESCRIPTION
Drive	Electric with LiFePo4 battery
Operator Type	Pedestrian
Rated Capacity/Rated Load	-
Rated Push / Pull Force (Stall)	-
Wheelbase Incl Additional Weight	L432x B574 (incl extra weigl
wt	
TYPE	DESCRIPTION
Machine weight incl. battery	-
Total weight	-
WHEELS / TYRES	
ТҮРЕ	DESCRIPTION
Tyres	PU/Solid Rubber Non-Marki
Tyres size, castor	Ø75
Tyres size	Ø150
Tread width	32
DIMENSIONS	
ТҮРЕ	DESCRIPTION
Overall length	600mm
Overall height	1180mm
Overall width	740mm
Gripper stroke	2x 193
Ground clearance machine	15
Turning radius	-
PERFORMANCE	
TYPE	DESCRIPTION
Travel speeds forwards	-
Travel speed backwards	-
Max drawbar pull (S2 = 60 Min)	-
Max drawbar pull (S2 = 5 Min)	-
Maximum slope (5 Min)	-
Acceleration with-/without load	-
Service brake	Electromagnetic
DRIVE	
TYPE	DESCRIPTION
Drive motor output (S2 = 30 Min)	130
Battery voltage/nominal capacity	24-40Ah
Battery weight +/- 5%	8
OTHER	
ТҮРЕ	DESCRIPTION
Type of drive unit	DC